

## RT50.4M

160W RMS 4-Channel class-AB amplifier with integrated ISO connectors




### System diagram MTX RT50.4M

All the 1 meter extension cord are included

### Montage MTX MicroTHUNDER RT50.4M

Toutes les ralonges de 1 mètre sont livrées

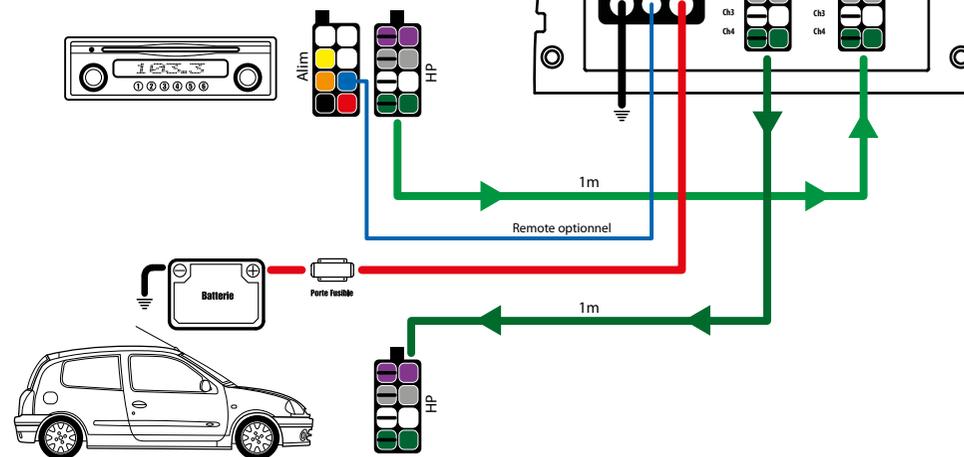


### Complementary product




ZNX6K - ZNX8K - ZNX10K

### MTX RT50.4M

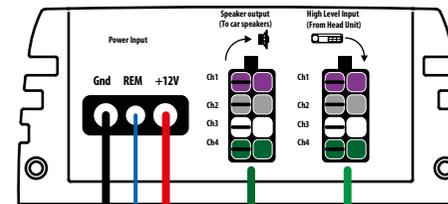

### Input/Output Panel Layout

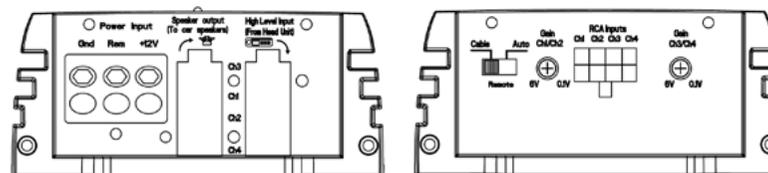

### Introduction

The MTX RT50.4M 4-channel amplifier (4x40W RMS) is easy to install because it is very small in size. It slips easily under a dashboard or in a glove box. It is also equipped with ISO connectors that allow it to easily interface in cars without cutting the original cables.

### Features

- World Premiere: The ISO terminal blocks are integrated directly into the amplifier to simplify the installation
- Fits between the head-unit and the car speakers, no cables to cut, the vehicle remains original
- Connections via 2 ISO connectors and a screwed power supply terminal block
- Supplied with two 1 meter extension cords (speaker inputs, speaker outputs)
- High-level inputs (on ISO terminal block) and RCA (on RCA terminal block), HP outputs on ISO terminal block
- Automatic remote or remote by cable (no need to look for a remote on an original car radio)
- Aluminum construction for a robust quality product
- More sound quality, bass, smoothness and musicality
- Incredibly easy to install between the car stereo and the original HP cabinet
- A power supply must be drawn from the vehicle's fuse box due to the high power: 160 real watts

### Specifications

- CEA RMS Power: 4x 40W @4Ω THD+N ≤1%
- Signal-to-Noise Ratio (1 watt): > 90dB
- THD+Noise (Distortion) (1 watt): ≤ 1%
- Frequency Response (±1dB): 20Hz- 30000Hz
- Maximum Input Signal: 6V
- Maximum Sensitivity: 100mV
- Power input: 6mm2 connections
- High level inputs: ISO connector
- Speaker outputs: ISO connector
- Low level inputs: RCA connector
- Dimensions: 244 x 120 x 52mm

mtxaudio.eu

facebook.com/MTXEurope

twitter.com/MTXEurope