



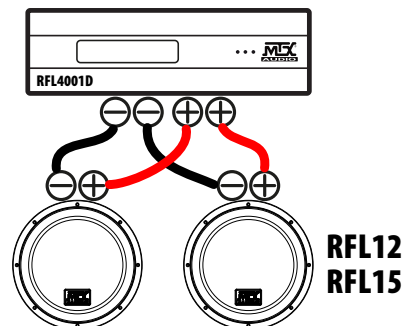

Developed and optimised to drive  
RFL12 and RFL15 subs



### Features RFL4001D

Unlimited Power

Compatible with 1Ω, 2Ω and 4Ω

High efficiency Class-D amplifier

Full aluminium High-End  
Construction

Double power connections  
4x 50mm<sup>2</sup>

Everything is included  
(EBC, Subsonic, LP, Bridge...)

Bridge Mode for 8000W rms  
mindblowing power

### Specifications RFL4001D

- Class-D Mono Block amplifier (1 channel)
- CEA2006 certified output power :
  - 1x 4000 Watts RMS @ 1Ω and THD+N ≤1%
  - 1x 2500 Watts RMS @ 2Ω and THD+N ≤1%
  - 1x 1500 Watts RMS @ 4Ω and THD+N ≤1%
- Damping factor : >500
- Can be connected in Bridge mode (2 amps)
- Active X-over :
- Low pass (LPF) 24dB/Oct variable from 40Hz to 180Hz
- Subsonic filter 24dB/Oct at 20Hz
- Phase switch 0° or 180°
- Signal/noise ratio (1 watt) : >75dB
- THD+Noise (Distortion) (1 watt) : ≤0,1%
- Frequency response (±1dB) : 10Hz-150Hz
- Input sensitivity RCA : 100mV to 6V
- EBC remote (External Bass Control) included
- Dimensions : 626mm x 204mm x 59mm

mtxaudio.eu

facebook.com/MTXEurope

twitter.com/MTXEurope