TX2450

300W RMS 4-Channel class-AB amplifier with variable active x-over

Specifications

- 4-Channel Class-AB wide range amplifier
- CEA2006 certified Power Output :
  - 4x75W RMS @2Ω and THD+N ≤1%
  - 4x50W RMS @4Ω and THD+N ≤1%
  - 2x150W RMS bridged @4Ω and THD+N ≤1%
- Crossover :
  - High pass 12dB/oct, variable from 50Hz to 120Hz
  - Low pass 12dB/oct, variable from 50Hz to 120Hz
- Signal-to-Noise Ratio (1 Watt) : > 73dB
- THD+Noise (Distortion) (1 Watt) : ≤ 0,2%
- Frequency Response (±1dB) : 10Hz-60000Hz
- Maximum Input Signal : 6V
- Maximum Sensitivity : 200mV
- Dimensions : 220x135x52mm
- High level inputs
- Optional EBC remote control

Wide range Class-AB amp for speakers and subwoofer

Bridge mode for a subwoofer or an enclosure

Optimized for 2Ω loads in stereo and 4Ω loads in bridge mono

12dB/Oct high-pass or low-pass x-over variable from 50Hz to 120Hz for speakers or subwoofer on the 4-Ch

Full aluminum construction

Optimized for RTE12AS, RTE12AV, RTF10AS, RTT12AV, TR12AV, RT10AS, RT12AV

Optional EBC remote control sold separately (Reference : EBC-1)

Bridge mode





Complementary products

EBC en option (Ref : EBC-1)



ZNX8K - ZNX10K

Examples of use



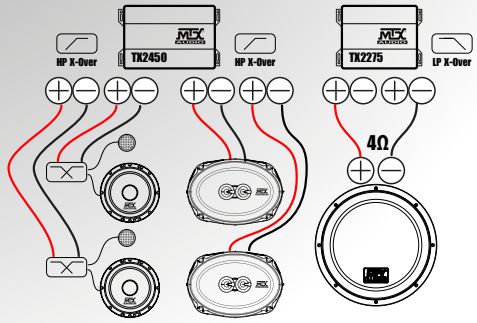

mtxaudio.eu

facebook.com/MTXEurope

twitter.com/MTXEurope